




5th Wheel

True Connection

360° nesting of the kingpin.
No need for extra kingpin adapters.
Reduces the risk of false hookups & trailer drops

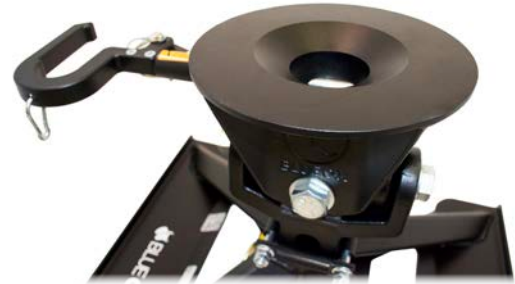

Dual Articulating Head

Hitch head articulates from front to back, side to side, allowing the trailer to move with the truck over uneven ground.



Adjustable Height

Height adjustments 17", 18", and 19"
(3" height adjustments). The head height adjusts with 4 bolts.



Lightweight Design

Two sturdy pieces. Remove the hitch easily and reclaim your truck bed.

BXR2100: 125 lbs. Base: 74 lbs. Head: 51 lbs.

BXR2410: 101 lbs. Base: 50 lbs. Head: 51 lbs.



Pinnacle Of Protection

E-coat Immersion ensures 100% coverage of complex parts, as well as uniform thickness. This in turn ensures superior corrosion protection. We add a Powder Coat on top of the E-Coat to make our products UV stable, lending an increased protection to products that face exposure to the elements. 3 year limited warranty.

A Fourth Generation Family Owned Company

BXR2100

Compatible with 2-5/16 Gooseneck Hitch



Rated for 21,000 lbs. Gross Towing Capacity
5,000 lb. Vertical Load Limit.

BXR2410

Attaches to Industry Standard Bed Rails



Rated for 24,000 Gross Towing Capacity
6,000 lb. Vertical Load Limit

Accessories



BXR9004
Wheel Lube Plate




BX88360
Wheel Kingpin Lock




BXR9005
Rotaflex Lockout




BXR9009
OEM Ball Adapter



BX88356
Hitch Wiring Harness



BXR9006
Anti-slip Mat

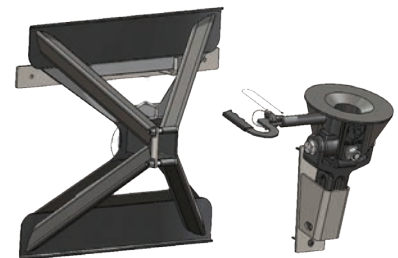

BXR9003
Wall Storage Mount

292-7346

Customer Care

800-228-9289 • info@blueox.com

blueox.com

